


200SS-VA WATERMARK Sensor Adapter

The 200SS-VA adapter reads a WATERMARK 200SS soil water sensor and outputs the measurement as a 0 to 2.8V analog signal, making the WATERMARK sensor readable by a wide range of devices.

Calibration is handled internally, providing a voltage output directly proportional to the WATERMARK centibar (kPa) reading. Readings can optionally be temperature compensated with the addition of a 200TS Soil Temperature Sensor.

Fully potted and weatherproof, the 200SS-VA is rated for indoor or outdoor installation.

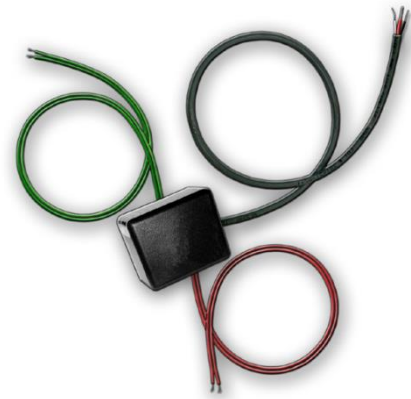

Operation

After 500ms of applying power to the adapter, an accurate reading will be available and updated every second while powered. Standard range of measurement is 0 to 239 centibars/kPa represented as 0 to 2.8VDC output (0.0117 volts/centibar).

NOTE: The 200SS-VA adapter does not provide sensor isolation. If multiple adapters are being read on the same device, power and ground must be switched independently for each adapter to avoid interference between sensors in the ground.

Specifications

OUTPUT: Variable voltage from 0 to 2.8V

RESOLUTION: 0.01176 volts per centibar

WEIGHT: 0.175 lbs (79.4 g)

DIMENSIONS: 1.5" x 1.25" x 0.75" (38mm x 32 mm x 20mm)

CABLE: 18" (46cm), 3 conductor direct burial output, two 18" (46cm) 2 conductor sensor inputs

RANGE: 0 to 239 centibar (kPa)

MATERIAL: ABS enclosure, epoxy potted circuit board, PVC jacketed tinned copper wire

POWER:

INPUT: min: 3.2VDC max: 30VDC

POWER UP TIME: 500ms

UPDATE RATE: 1 sec

CURRENT: 1.5 mA

