


FOR IRROMETER
TECHNICAL SUPPORT
CALL (951) 689-1701

WATER TIGHT
RUST PROOF
DUST PROOF
SHATTER PROOF FACE

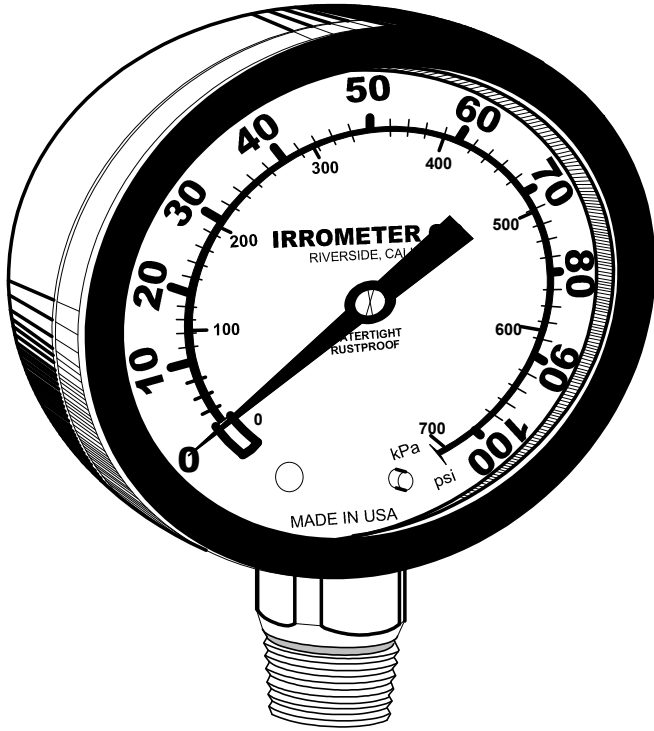

THIS DURABLE, SPECIALLY
CONSTRUCTED HERMETICALLY
SEALED GAUGE IS DESIGNED
TO GREATLY LENGTHEN
SERVICE LIFE

HERMETICALLY SEALED 2" PRESSURE GAUGE
PRESSURE RANGE(S):

- ___ 0-15 PSI
- ___ 0-30 PSI
- ___ 0-60 PSI
- ___ 0-100 PSI
- ___ 0-200 PSI
- ___ 0-400 PSI

AVAILABLE WITH
FACTORY INSTALLED
INTERNAL SNUBBER
TO HELP ABSORB SURGES
(SNUBBER REMOVEABLE
FOR CLEANING)

___ S

ALL GAUGES ARE DUAL SCALE WITH PSI AND kPa
ASME B40.1 GRADE B COMMERCIAL SERIES
1/4" NPT BRASS BOTTOM CONNECTION
INTERNAL COMPONENTS:

BRASS WITH NYLON GEAR AND PHOSPHORUS BRONZE BOURDON TUBE
CLEAR BUTYRATE OUTER FACE AND POLYCARBONATE INTERNAL FACE
THERMO PLASTIC RUBBER (TPR) COVER

Gauge 1 | Irrometer Hermetically Sealed Pressure Gauge