


# IRROMETER®

1425 PALMYRITA AVE  
 RIVERSIDE, CA 92507  
 P: 951.682.9505  
 E: TECHSUPPORT@IRROMETER.COM

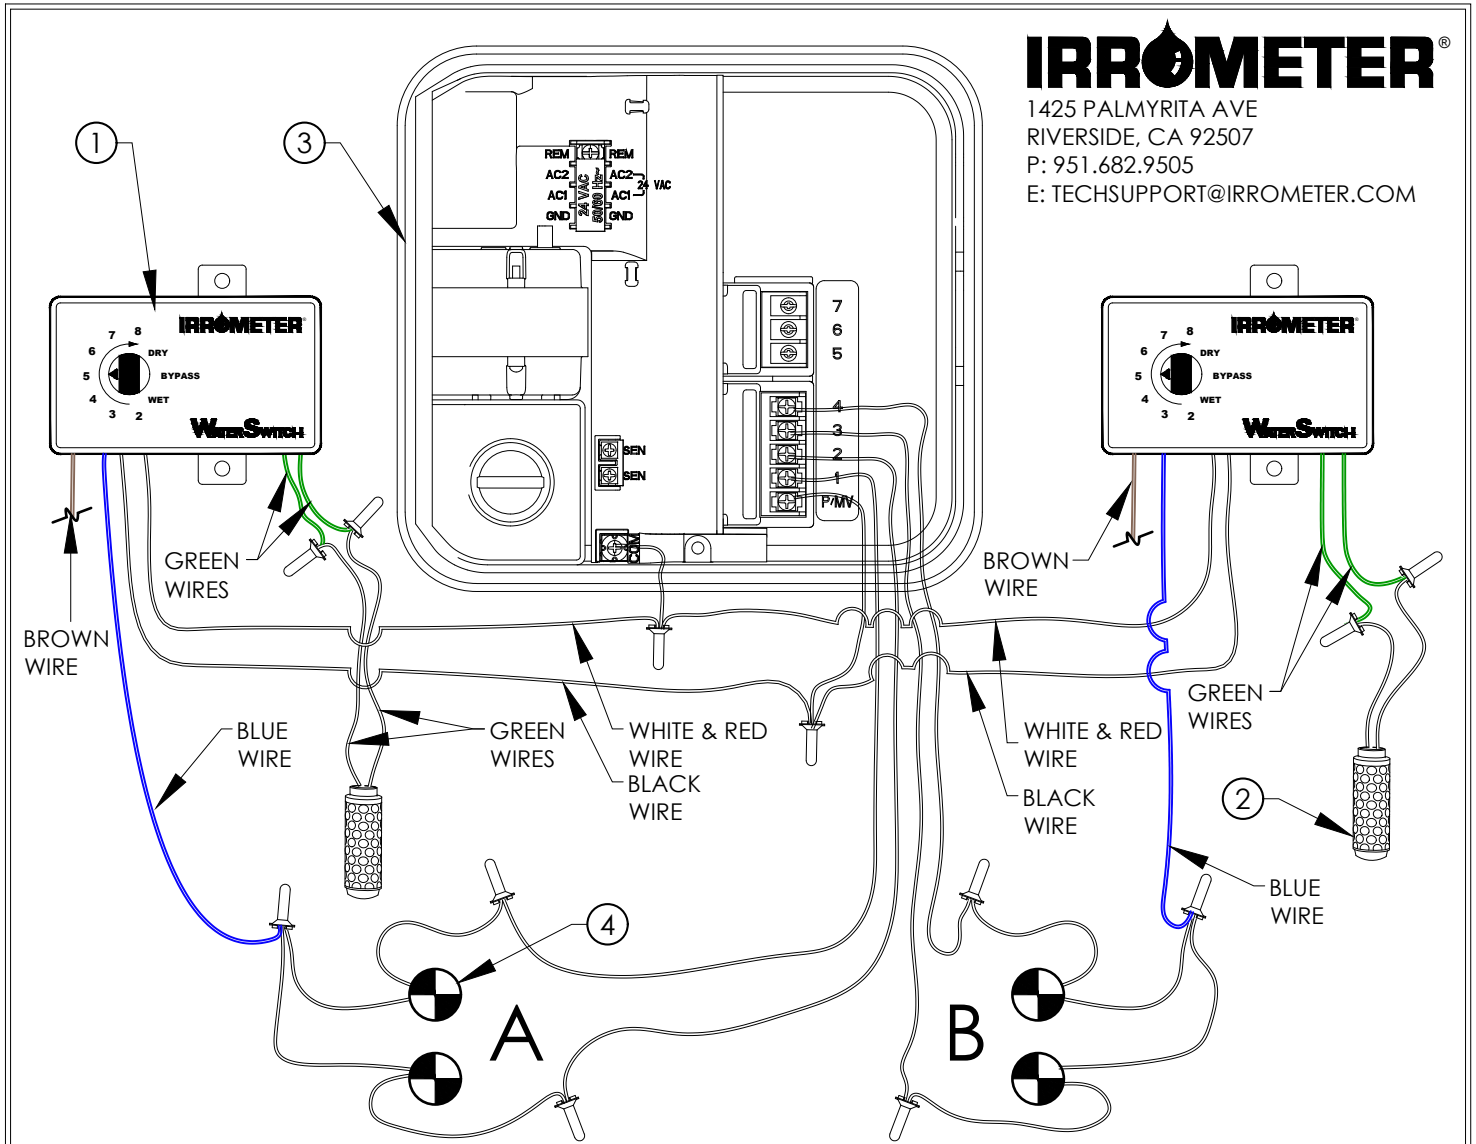

- ① WATERMARK ELECTRIC MODULE (WEM)
- ② WATERMARK MODEL 200SS SOIL MOISTURE SENSOR. INSTALL PER MANUFACTURER SPECIFICATIONS
- ③ IRRIGATION CONTROLLER
- ④ REMOTE CONTROL VALVE

**NOTES:**

- A SIMPLE "TWO HYDROZONE" SOIL MOISTURE CONTROL SYSTEM WHICH UTILIZES A STANDARD 24 VAC TIME CLOCK HAVING A MASTER VALVE (MV) OR PUMP START (PS) CIRCUIT. IN THE ABOVE EXAMPLE, VALVES 1&2 IRRIGATE TURF GRASS (HYDROZONE #1). VALVES 3&4 IRRIGATE SHRUB & GROUNDCOVER AREAS (HYDROZONE #2). EACH HYDROZONE HAS ITS OWN MOISTURE SENSOR LOCATION AND AN INDEPENDENT FULLY ADJUSTABLE WS-AC MOUNTED AT THE CONTROLLER. DO NOT CONNECT WS-AC UNTIL PLANTS ARE ESTABLISHED.

MV MUST HAVE "OFF" TIME BETWEEN STATIONS

NO SCALE

## TWO HYDROZONE WIRING DIAGRAM